




















ASSEMBLY INSTRUCTIONS



PARTS IDENTIFICATION


A		TABLE TOP	1 PC
B		TABLE LEG	4 PCS
C		CHAIR BACK	4 PCS
D		CUSHION SEAT WITH FRAME	4 PCS
E		FRONT LEG	8 PCS
F		LEFT SIDE STRETCHER	4 PCS
G		RIGHT SIDE STRETCHER	4 PCS
H		FRONT STRETCHER	4 PCS

HARDWARE IDENTIFICATION


1		LARGE MEDIUM BOLT	8 PCS
2		LARGE LOCK WASHER	8 PCS
3		LARGE FLAT WASHER	8 PCS
4		LONG ALLEN WRENCH	1 PC
5		LONG BOLT	16 PCS
6		MEDIUM BOLT	16 PCS
7		SHORT BOLT	4 PCS
8		SMALL LOCK WASHER	36 PCS
9		SMALL FLAT WASHER	36 PCS
10		SHORT ALLEN WRENCH	1 PC
11		FLAT HEAD SCREW	24 PCS

NOTE: QUATTIES SHOWN ARE FOR TWO CHAIRS

STEP 1 Place table top upside down on soft surface. Align and fasten table legs to table top using large medium bolt large lock washer and large flat washer and tighten with Allen wrench

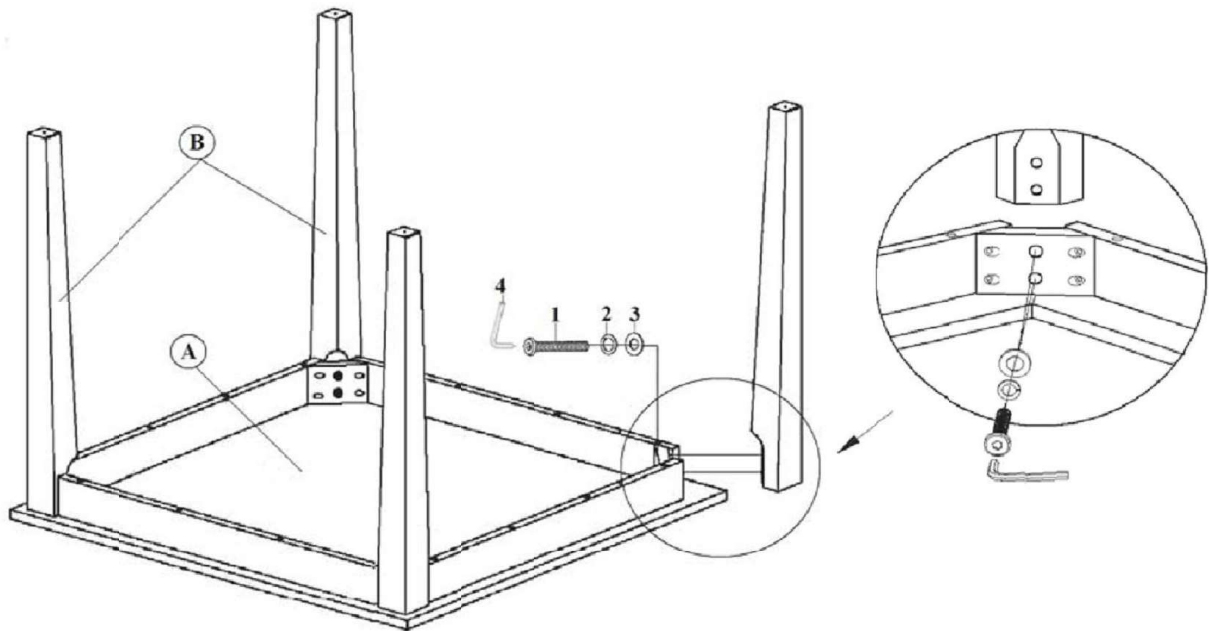


STEP 2 : COMPLETED

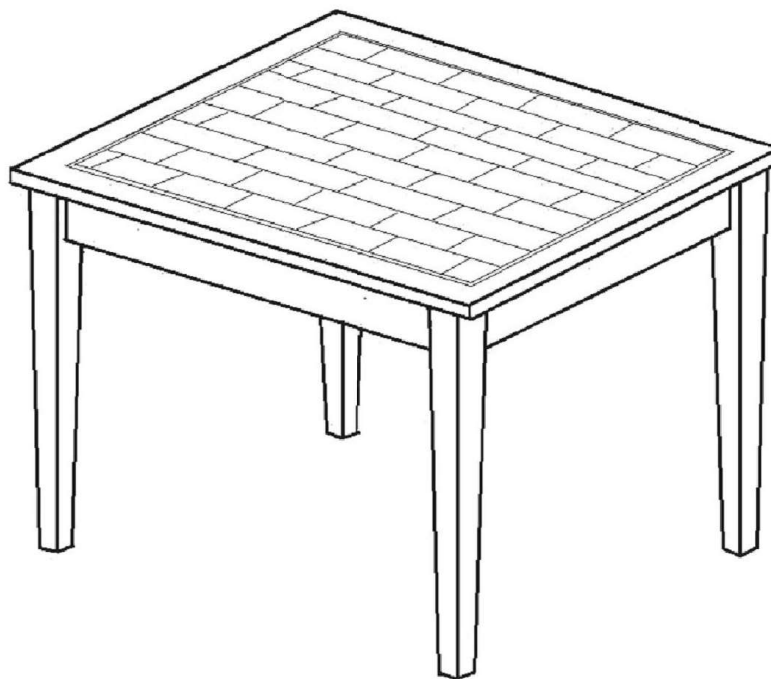


STEP 3

- (1) Align and fasten cushion seat with frame to chair back bottom rail using short bolt, small lock washer and small flat washer and tighten with Allen wrench
- (2) Fasten cushion seat with frame to chair back leg using long bolt, small lock washer and small flat washer then tighten with Allen wrench

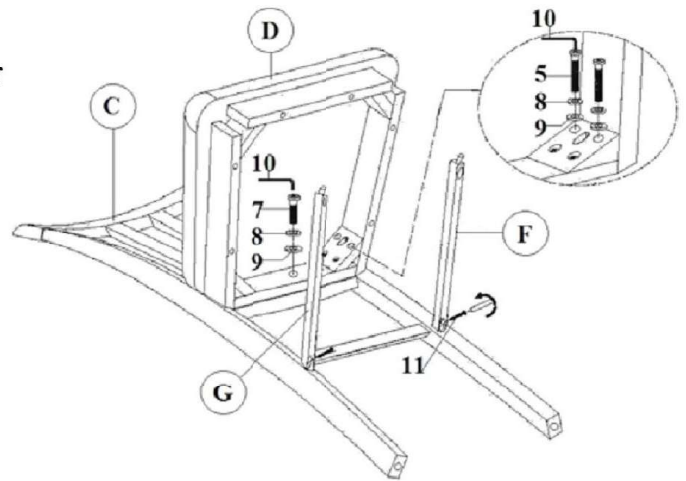**STEP 4**

- (1) Align and insert front stretcher into front leg,
- (2) Align and insert side stretcher into the chair back leg
- (3) Align and insert side stretcher into front leg fasten front leg to cushion seat with frame using small medium bolt, small lock washer and small flat washer and tighten with Allen wrench
- (4) Insert screw into the bottom of front and side stretcher and tighten with screw driver (not included)

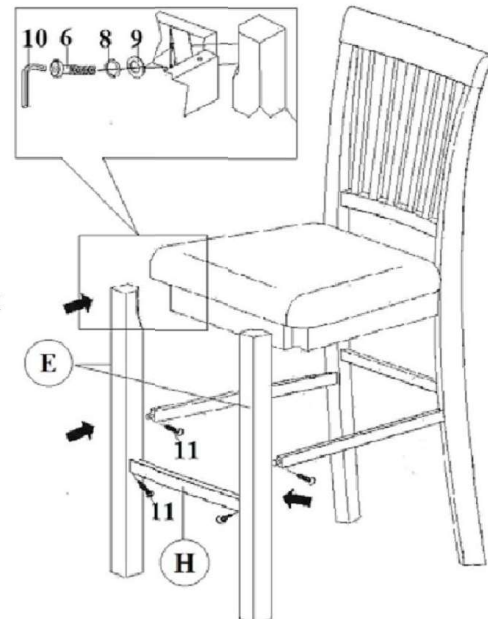**STEP 5 : COMPLETED**